

OLMO




SINGLE-ZONE SIERRA SERIES

WALL MOUNTED MINI SPLIT SYSTEM

9-36k Btu
Up to 22.5 SEER2 Rating



INCLUDED

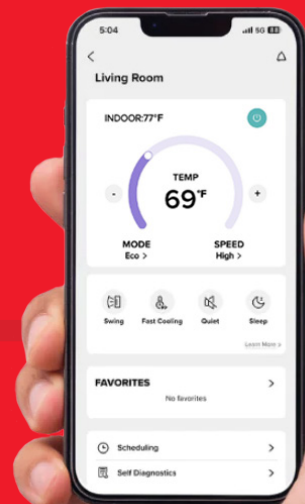

olmo-comfort.com

9-36k Btu

OLMO

Indoor Model		OS-09SRW-115VI	OS-12SRW-115VI	OS-09SRW-230VI	OS-12SRW-230VI	OS-18SRW-230VI	OS-24SRW-230VI	OS-36SRW-230VI
Outdoor Model		OS-SR09-115VO	OS-SR12-115VO	OS-SR09-230VO	OS-SR12-230VO	OS-SR18-230VO	OS-SR24-230VO	OS-SR36-230VO
Power Supply	V-Ph-Hz	115V-1Ph-60	115V-1Ph-60	208/230V-1Ph-60	208/230V-1Ph-60	208/230V-1Ph-60	208/230V-1Ph-60	208/230V-1Ph-60
Cooling	Capacity	Btu/h	9000	12000	9000	12000	18000	24000
	EER2	Btu/h	12.5	10.2	12.95	11.1	11.95	10.6
	SEER2	Btu/h	20.0	18.0	22.5	20.0	21.0	19.5
Heating	Rated Capacity	Btu/h	9500	12000	9000	12000	18000	24000
	HSPF4	Btu/h	9.0	8.5	8.5	8.5	9.8	8.5
	HSPF5	Btu/h	7.0	8.0	8.0	8.0	9.0	8.0
	COP2	W/W	4.1	3.4	4.12	3.5	3.91	3.3
Minimum Circuit Ampacity	A	14.6	15.6	9.5	9.5	14.5	21	26.8
Max Fuse	A	25	25	15	15	20	35	35
Indoor Air Flow (Turbo/Hi/Mi/Lo/Si)	CFM	353/382/341/294/247	365/394/365/312/253	353/382/341/294/247	365/394/365/312/253	647/647/588/482/382	706/706/647/559/441	706/706/647/559/441/647
Indoor Noise Level (Turbo/Hi/Mi/Lo)	dB(A)	42/39/37/35	42/39/37/35	42/39/37/35	42/39/37/35	48/45/41/39	50/48/43/41	50/47/43/39
Indoor Unit	Dimensions (WxDxH)	in	33.5x10.62x8.19	33.5x10.62x8.19	33.5x10.62x8.19	33.5x10.62x8.19	42.5x12.37x9	42.5x12.37x9
	Packing (WxDxH)	in	35.87x13.13x10.25	35.87x13.13x10.25	35.87x13.13x10.25	35.87x13.13x10.25	48x15.75x12.19	48x15.75x12.19
	Net/Gross Weight	lbs	18.5/23.1	18.5/23.1	18.5/23.1	18.5/23.1	30.9/37.5	29.8/ 37.5
Outdoor Air Flow (Hi)	CFM	470	488	470	488	588	647	647
Outdoor Side Noise Level	dB(A)	53	53	53	53	56	60	60
Outdoor Unit	Dimensions (WxDxH)	in	28.13x21.25x9.5	28.13x21.25x9.5	28.13x21.25x9.5	28.13x21.25x9.5	31.88x23x11	33.88x25.5x12.2
	Packing (WxDxH)	in	32.67x23.62 x13.18	32.67x23.62 x13.18	32.67x23.62 x13.18	32.67x23.62 x13.18	37x25.19x15.15	39.17x28.34x16.53
	Net/Gross Weight	in	52.9/61.7	57.3/66.1	48.5/57.3	52.9/ 61.7	75/ 82.7	101.4/ 110.2
Refrigerant Type/Quantity	oz	R32/21.2	R32/21.9	R32/20.5	R32/21.9	R32/45.9	R32/47.6	R32/72.4
Refrigerant Precharge	ft	24.6	24.6	24.6	24.6	24.6	24.6	24.6
Design Pressure	PSIG	620	620	620	620	620	620	620
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"
	Max Refrigerant Pipe Length	ft	65.6	65.6	65.6	65.6	98.4	98.4
	Max. Difference in Level	ft	49.2	49.2	49.2	49.2	49.2	49.2
Ambient Temperature	Indoor (Cooling/Heating)	°F	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75
	Outdoor (Cooling/Heating)	°F	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75	5~118/-5~75

Note: This units comes with the Communication Cable and Line Set (16 ft.) included in the box.

Features:

- Remote Control Included
- Smart Connect from Anywhere
- Comfortable Sleep Mode
- Turbo and Eco Modes
- Multiple Fan Speeds
- Timer
- Louver Auto Swing
- Self Clean Mode
- LED Display



For more information visit olmo-comfort.com
 Manufacturer reserves the right to discontinue or change specifications at anytime without notice or incurring obligations.
 ©2024 All rights reserved.
 11112024