

**OS-RM09SW-230VI**

**Job Name:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Engineer:** \_\_\_\_\_  
**Submitted to:** \_\_\_\_\_  
**Submitted by:** \_\_\_\_\_  
**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_  
**Approval:** \_\_\_\_\_  
**Construction:** \_\_\_\_\_  
**Unit #:** \_\_\_\_\_  
**Drawing #:** \_\_\_\_\_

**KEY FEATURES:**

- R454B Refrigerant
- Remote Control Included
- Smart Connect from Anywhere
- Comfortable Sleep Mode
- Turbo and Eco Modes
- Multiple Fan Speeds
- Can be installed up to 2" from ceiling
- Timer
- Louver Auto Swing
- Self Clean Mode
- LED Display

**SPECIFICATIONS:**


Indoor Model			OS-RM09SW-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	9,000
Heating	Rated Capacity	Btu/h	9,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	5
Indoor Air Flow (Hi/Mi/Lo)		CFM	382/341/294/247
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	39/37/35
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/3/8"
Dehumidification		Pnt/H	1.6
Communication wiring			AWG 18-4
Indoor	Dimension (WxDxH)	Inch	32 1/16x10 5/8x8 7/16
	Packing (WxDxH)	Inch	34 1/4x13 3/16x10 7/16
	Net/Gross Weight	lbs.	18.7/23.1



OS-RM09SW-230VI



OS-RM09SW-230VI

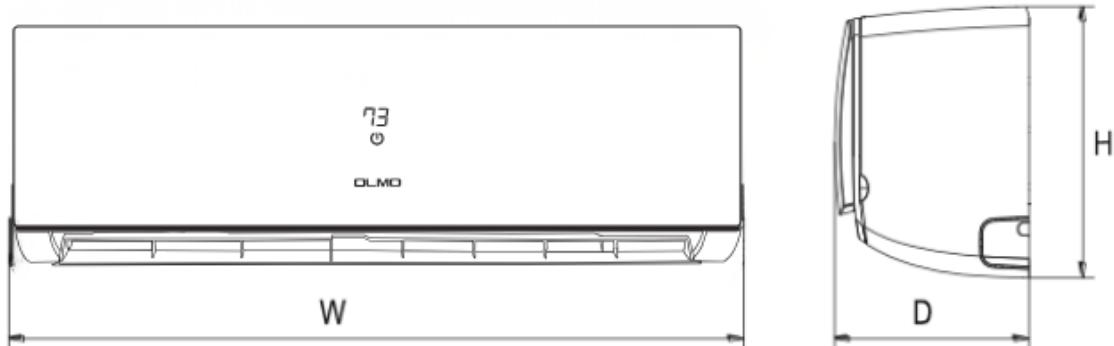

W	D	H
32.02 in	8.13 in	10.75 in