

**OS-RM12SW-230VI**

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

**KEY FEATURES:**

- R454B Refrigerant
- Remote Control Included
- Smart Connect from Anywhere
- Comfortable Sleep Mode
- Turbo and Eco Modes
- Multiple Fan Speeds
- Can be installed up to 2" from ceiling
- Timer
- Louver Auto Swing
- Self Clean Mode
- LED Display

**SPECIFICATIONS:**



Indoor Model			OS-RM12SW-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	12,000
Heating	Rated Capacity	Btu/h	12,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	5
Indoor Air Flow (Hi/Mi/Lo)		CFM	394/365/312/253
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	39/37/35
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/3/8"
Dehumidification		Pnt/H	2.1
Communication wiring			AWG 18-4
Indoor	Dimension (WxDxH)	Inch	32 1/16x10 5/8x8 7/16
	Packing (WxDxH)	Inch	34 1/4x13 3/16x10 7/16
	Net/Gross Weight	lbs.	18.7/23.1



OS-RM12SW-230VI



OS-RM12SW-203VI

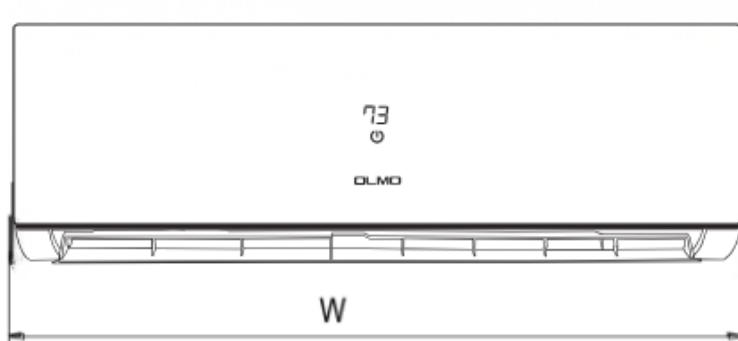

W	D	H
37.38 in	8.13 in	10.75 in