

**OS-RM24SW-230VI**

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

**KEY FEATURES:**

- R454B Refrigerant
- Remote Control Included
- Smart Connect from Anywhere
- Comfortable Sleep Mode
- Turbo and Eco Modes
- Multiple Fan Speeds
- Can be installed up to 2" from ceiling
- Timer
- Louver Auto Swing
- Self Clean Mode
- LED Display

**SPECIFICATIONS:**



Indoor Model			OS-RM24SW-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	24,000
Heating	Rated Capacity	Btu/h	24,000
Minimum Circuit Ampacity (MCA)		A	3
Max. Fuse		A	5
Indoor Air Flow (Hi/Mi/Lo)		CFM	706/647/559/441
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	48/43/41
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	3/4"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	3/8"/5/8"
Dehumidification		Pnt/H	3.5
Communication wiring			AWG 18-4
Indoor	Dimension (WxDxH)	Inch	42 3/4x12 3/8x9 5/16
	Packing (WxDxH)	Inch	46 1/16x15 3/8x12 7/16
	Net/Gross Weight	lbs.	30.9/37.5



OS-RM24SW-230VI



OS-RM24SW-203VI

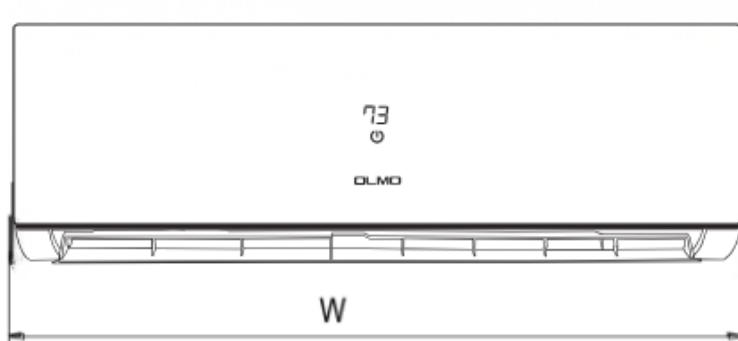

W	D	H
48 in	9.25 in	12.63 in